

Highlights

- Type J or K, or 0 - 5 V output
- Two models cover temperature ranges from 0 to 500°C
- IP 65 stainless steel electronics housing
- 4:1 optics at 90% energy
- 350 ms (95%) response time
- Powered by 12 – 24 VDC at 20 mA
- Accessories for cooling and air purging


General Specifications

Environmental Rating	IP65 (IEC 529)
Ambient Temperature	
Sensing head	0 to 70°C
With air cooling	up to 90°C
With water cooling	up to 260°C
Storage Temperature	-30 to 85°C
Relative Humidity	10 to 95%, non-condensing
Shock	IEC 68-2-27, 50 g's, 11 ms, any axis
Vibration	IEC 68-2-27, 3 g's, any axis, 11–200 Hz
Dimension	L 89 mm, Ø 19 mm
Weight	130 g

Electrical Specifications

Outputs	User-selectable thermocouple output (model specific, either J or K) or voltage output 10 mV/°C
Cable Length	1 m standard, longer cables optional
Output Impedance (J/K)	50 Ω
Minimum Load Impedance (mV)	50 kΩ
Power Supply	12 – 24 VDC, ±5%, 20 mA

Optical Specifications

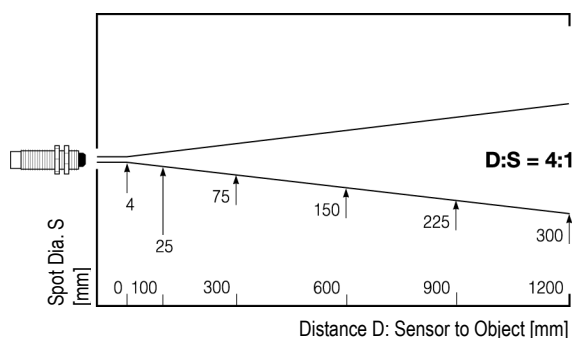

Raytek Compact Series

CI Datasheet



Measurement Specifications


Temperature Range	
Model A ¹	0 to 115°C
Model B ²	100 to 500°C
Spectral Response	7 to 18 μm
Accuracy	±2% or ±3°C ³
Repeatability	±1% or ±1°C ³
Temperature Resolution	0,5°C
Response Time	350 ms (95%)
Emissivity	fixed at 0,95

¹ whole temperature range 0 to 500°C, but specification guaranteed only within 0 to 115°C

² whole temperature range 0 to 500°C, but specification guaranteed only within 100 to 500°C

³ whichever is greater

Dimensions

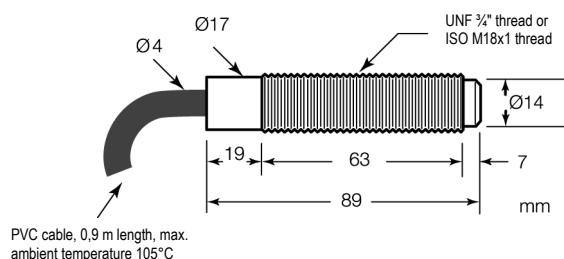


Accessories


Each sensor includes two mounting nuts, 1 m of cable, and an operator's manual. Additional accessories are available:

- Cable extension accessories for mV or thermocouple: 7,5 m, 15 m or 30 m


Adjustable Bracket (XXXCIADJB)

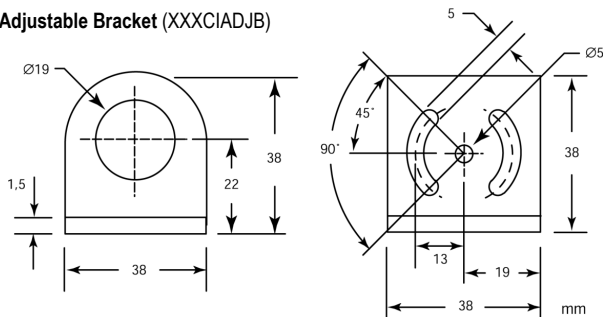

Fixed Bracket (XXXCIACFB)

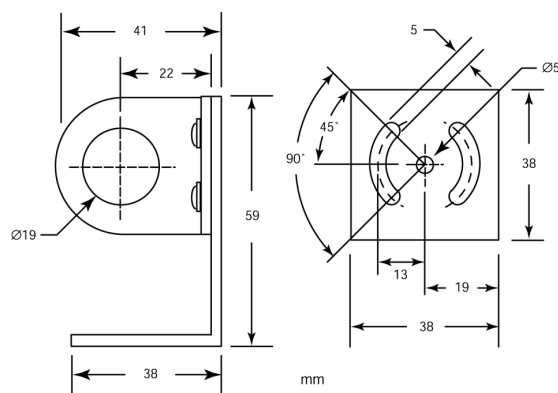

Air Purge Collar with metric thread (XXXCIACPM)

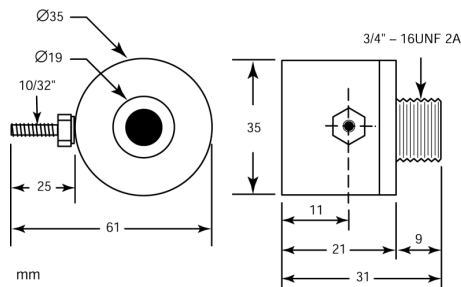


Options


Options must be specified at time of order:

- Cable lengths 3 or 15 m
- High Temperature Cable (max. 260°C)
- Water-Cooling Jacket incl. Air Purge Collar (...W), not for sensors with M18x1 thread

Water-Cooling Jacket (...W)

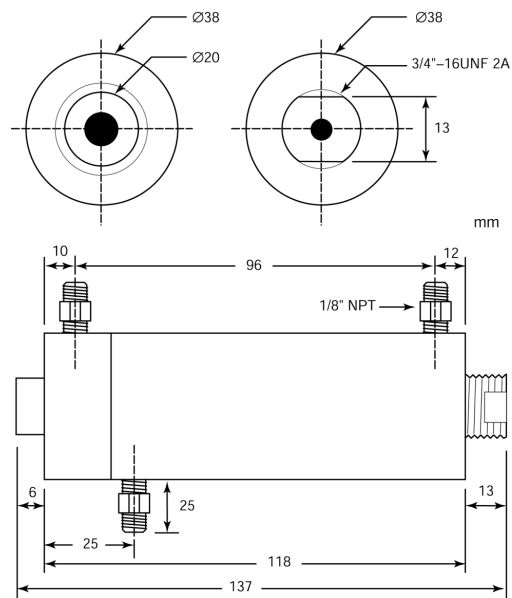

Right Angle Mirror (XXXCIACRA), not for metric threads

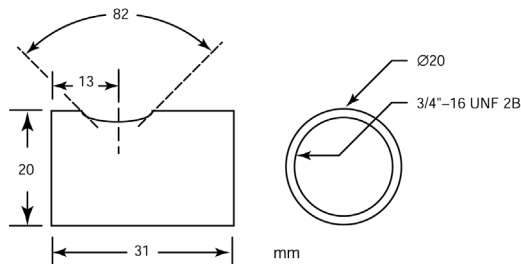

59401, Rev. D, 06/2006 – Raytek and the Raytek Logo are registered trademarks of Raytek Corporation. Specifications subject to change without notice. Raytek is ISO 9001 certified.

www.raytek.com
for up-to-the-minute features

Lana Sarrate



Paseo Manuel Girona, 2

08034 - Barcelona

Tlf. 932.80.01.01 - Fax. 932.80.64.16

www.lanasarrate.es

lanasarrate@lanasarrate.es

Raytek®
A Fluke Company