

Mechanical single/dual pressure switch
Repeatability $\pm 1.0\%$ at constant temperature

Features

Bourdon tube pressure switch
 All welded parts wetted.
 Direct acting, no friction, high accuracy

Adjustment ranges

5.3 ... 496 bar

Applications

Petrochemicals industry,
 Process technology,
 Shipbuilding technology,
 Alarm applications



Art. no. 923-1500 Index: F

Technical Data

Wetted parts:	
Process connection:	Stainless steel 1.4401
Bourdon tube:	Stainless steel 1.4401
Repeatability:	$\pm 1\%$ at constant temperature
Switching rate:	max. 20/min
Temperature range:	$-40^{\circ}\text{C} \dots +75^{\circ}\text{C}$
Protection class:	IP65
Housing:	Explosion proof housing, aluminum anodized and lacquered
Process connection:	1/4" NPT female thread except ranges marked with*). These switches have proof pressures above 500 bar and are provided with high pressure thread with adapter G1/4 IG.
Electrical connection:	Internal terminal strip (0.5-2.5 mm ²), approved cable gland has to be provided by the customer

Electrical rating and hysteresis:	Many micro switch versions with different switching powers and hysteresis are applicable and make it possible to make customized changes.
Weight:	B1X-...: approx. 3.9 kg B2X-...: approx. 3.9 kg
Set point adjustment:	Turn the adjustment screw clockwise to decrease the set point.
Intrinsically safe:	The switches are designed for intrinsically safe applications. Please add "Exi" to your ordering details when placing an order. To comply with the intrinsically safe approval following max. ratings must not be exceeded: U _{max} = 28 V I _{max} = 50 mA
Approval:	Ex: Ex d II C T6 acc. to ATEX cULus: Class I, Groups B, C, D Class II, Groups E, F, G acc. to Underwriter Laboratories Inc. and Canadian Standard Assn.

Pressure ranges

Pressure range code	Adjustment range [bar]		Max. operating pressure [bar]	Proof pressure [bar] (short term)	Max. hyst. of the different switches in bar (end of range)	
	Increasing press.	Decreasing press.			H, GH [bar]	M, GM [bar]
12SS	5.3 ... 83	3.4 ... 81	100	125	0.96	1.86
20SS	13.7 ... 137	11.0 ... 134	250	330	2.68	5.44
32SS	22.4 ... 220	16.5 ... 215	400	500	2.75	5.90
72SS*	79.3 ... 496	41.4 ... 459	600	950	16.90	37.90

Specifications are subject to changes without notice.


Pressure

Bourdon Tube Press. Switches

Type B1X-.../B2X-...

Dimensions (in mm / inch)

Art. no. 923-1500 Index: F

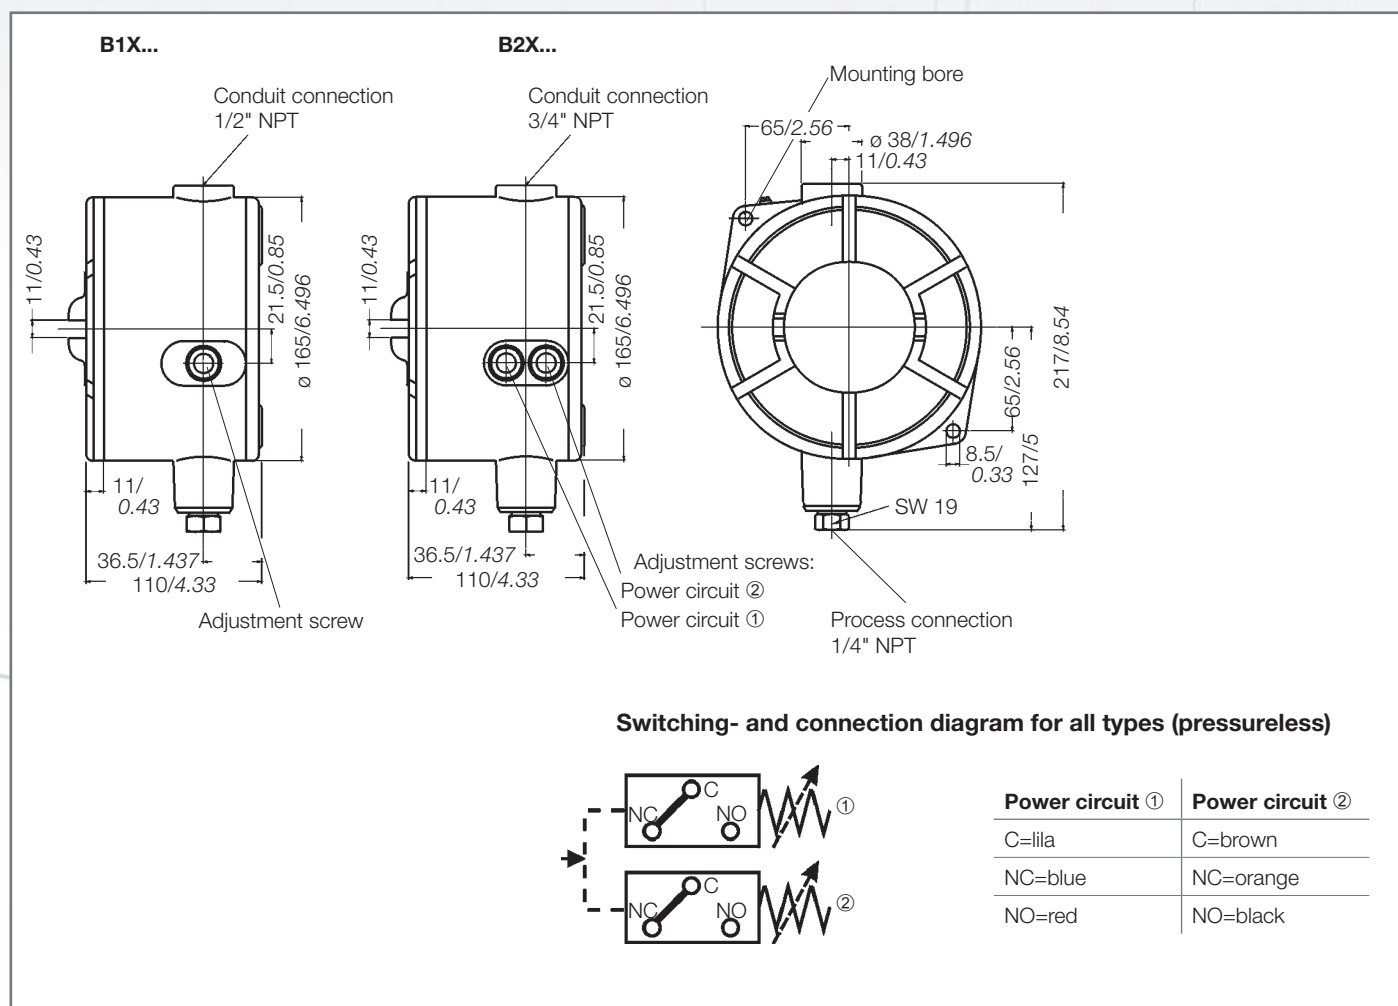

Electrical ratings

Micro switch	Special features	Volt AC 50/60 Hz	Ind. load A	Res. load A	Volt DC	Ind. load A	Res. load A	Comments
H	Micro switch with silver contacts	125 250 480*	10 10 3	10 10 3	6 to 24	0.50	0.5	Small hysteresis; High AC / low DC loads
M	Micro switch with silver contacts	125 250 480*	10 10 3	10 10 3	12 24 250*	5.00 1.00 0.25	15.0 2.0 0.4	Medium hysteresis; High AC and DC loads
GH GM	Micro switch with gold-plated contacts for low voltage and/or low current	125 30	1 0.1	1 0.1	24 30	1.00 0.10	1.0 0.1	Small hysteresis Medium hysteresis

* on request

Approvals

EX	Ex d approval
UL	cULus approval
EXI	Ex i approval

Ordering

Example for order number

Type	Micro switch	Pressure range code	Options	Approval
B1X or B2X	H	72SS	P2	UL

Your order number

Type	Micro switch	Pressure range code	Options	Approval

Options

P2 = 1/2" NPT F SS Process connection

P. Manuel Girona, 2 - 08034 Barcelona
Tlf. 932 80 01 01 - Fax 932 80 64 16

URL: www.lanasarrate.es
e-mail: lanasarrate@lanasarrate.es

Specifications are subject to changes without notice.