



FLEXIM



Lana Sarrate

PIOX® R721

Process Analytics by Inline Refractometry

Concentration / Density
Measurement

Unique Measuring Principle

Accurate / Drift-free

Performance Indication

Widely applicable



PIOX® R721

Process Analytics by Inline Refractometry

Unique measuring principle




Employing FLEXIM's patented transmitted light principle, light is transmitted through the medium rather than surface reflected. As a result, the instrument measures the refractive index of the medium, unaffected by any fouling film on the prism.




Drift-free measurement

The double prism employed negates the effect of fouling film or other contamination, producing virtually drift-free measurement.

Accurate

With a reproducibility of the refractive index $\pm nD 0.00002$, very accurate concentration measurements can be derived. FLEXIM provides a huge media database and, in the case of unique customer media, FLEXIM's laboratory will create the liquid file that can be added to the transmitter.

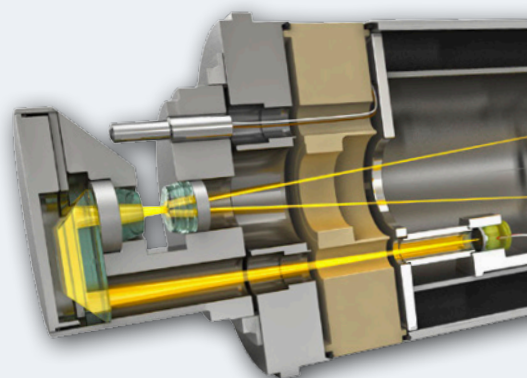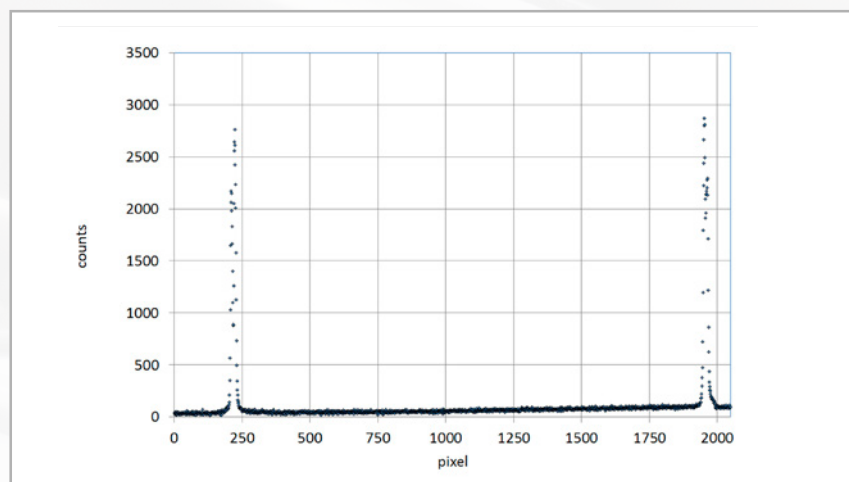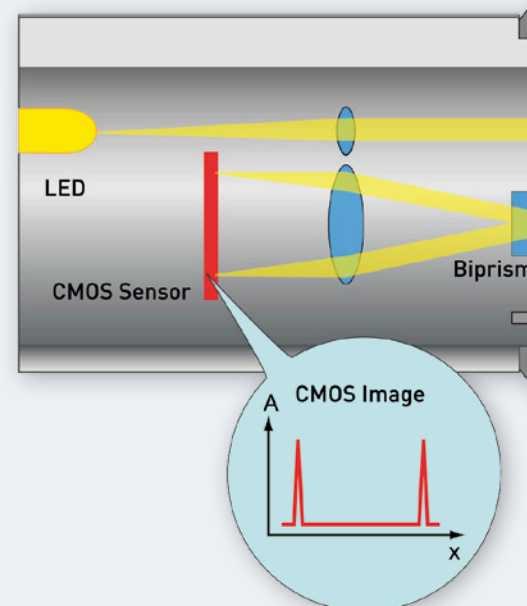

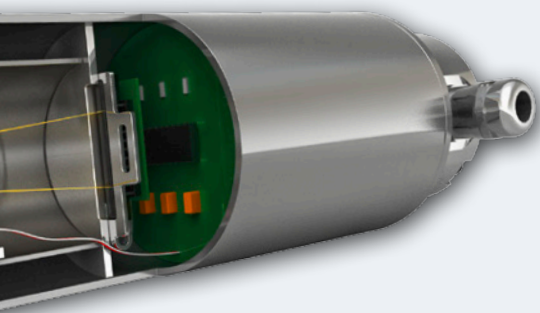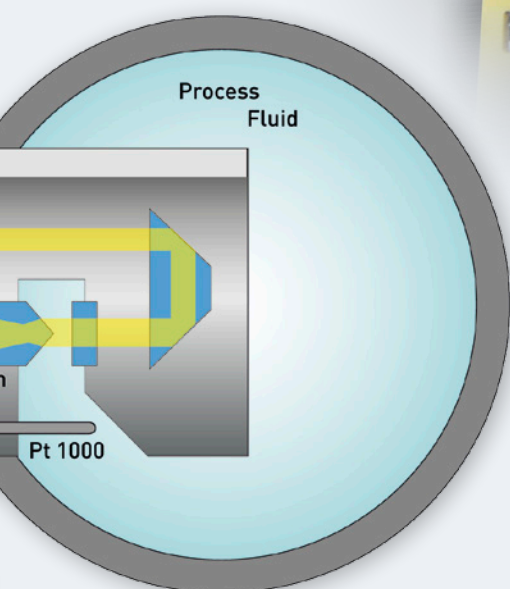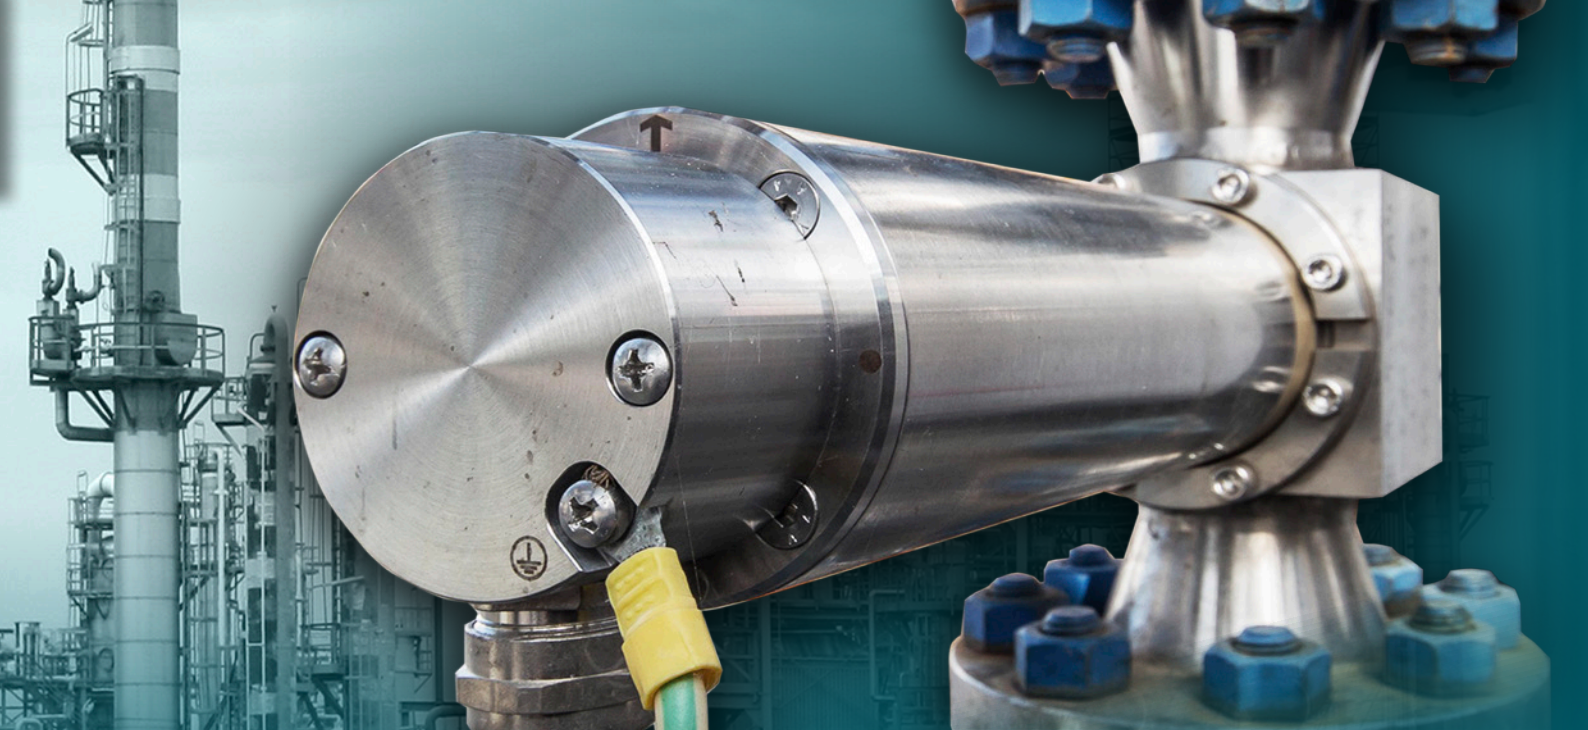

Fouling / turbidity measurement / diagnostic values

The newest generation of CMOS image converters is applied to convert the raw measurement data to practical values; which results in useful diagnostic values as well. The height, the shape and difference of the 2 peaks provides information about noise, fouling and turbidity and gives you useful information about the health of the measurement.

Versatile transmitter

The transmitter is able to handle complex measurement tasks and provides analog or digital (serial bus-systems) data outputs for process control and monitoring. By adding input(s), other process variables can be accommodated, by which the device can handle 3 component media; as an example a P10X® S (velocity of sound) can be combined.

Widely applicable

The sensor head is usually ordered in SS316L stainless steel with Kalrez sealing. However, a PTFE version is available in combination with different hazardous area ratings, attending to nearly all chemical resistance requirements. The transmitter is double-sealed for highest security. A sanitary design sensor is available. To complete the application, a variety of process connections and flow chambers are available.

FLEXIM

More than 25 years of experience
in Process Analytical Technology



PIOX® R	Process Refractometer Measurement according to FLEXIM's patented Transmitted Light Principle
Measuring quantities	Refractive index and refractive index at standard temperature, fluid temperature, concentration g/l, mass and vol %, density and density at standard temperature, scale values for example °Brix and °API, additional quantities programmable
Measurement range	nD: 1.3 ... 1.7, °Brix: 0 ...100
Measurement uncertainty Repeatability	nD: 0.0002 (corresponds to: 0.1 °Brix, 0.1 w%) nD: 0.00002 (corresponds to: 0.01 °Brix, 0.01 w%)
Operating temp. (fluid)	- 20 °C ... (+130 °C) +150 °C
Fluid pressure	PN 10, PN 16, on request PN 40 (depending on process connection)
Degree of protection / Explosion protection optional	Sensor R500: IP67, ATEX (IECEX) zone 0, 1, 2 Transmitter R721: aluminium or stainless steel enclosure, IP66, ATEX (IECEX) zone 2
Chemical Design variant Wetted parts, materials Housing material	Stainless steel 316Ti (1.4571) Stainless steel 304 (1.4301)
PTFE Chemical Design variant Wetted parts, materials Housing material	PTFE carbon-fiber reinforced bulk material powder coated stainless steel 304 (1.4301)
Process connection	DIN/ANSI flange, proprietary FLEXIM flow cell
Hygienic Design variant Wetted parts, materials Housing material	Stainless steel 316L (1.4404) Stainless steel 304 (1.4301)
Process connection	Compatible to Varivent or Tri-clamp connection

 **Lana Sarrate**

P. Manuel Girona, 2 - 08034 Barcelona
Tlf. 932 80 01 01 Fax 932 80 64 16

URL: www.lanasarrate.es

e-mail: lanasarrate@lanasarrate.es

