

Type UNS-MS1/8-BN25

Technical Data

Stem and Mounting Thread	: MS 1/8 = Brass G 1/8
Float	: BN 25=Buna N, Ø = 25 mm
Max. Operating Pressure	: 15 bar (Float)
Max. Operating Temperature	: -20 °C to +100 °C, (Oil) -20 °C to +80 °C, (Water)
Min. Fluid Specific Gravity	: 0,57 g/cm ³
Mounting Position	: vertical, +/- 30° Through top or bottom
Protection Class	: IP54
Electrical Connection	: PVC-Cable, max. 3 x 0,34 mm ² 1 m / 3 m / 5 m length
Contact Mode	: 1 - SPST-Switch (NO) 2 - SPST-Switch (NC) 3 - SPDT-Switch
Max. Contact Rating	: NO/NC: 230 V AC / DC 2 A, 40 VA / W SPDT: 150 V AC / 100 V DC 0,2 A, 3 VA / W
Weight	: Appr. 40 g

By turning the float upside down the function of the switch contact can be changed from NO (standard) in NC or vice versa.
(Not possible with SPDT contacts)

The contact modes (NO or NC) are defined on the basis of an empty tank and for a level switch mounted through the top.


Order Numbers

Type	Contact Mode	Cable Type/Length	Order Number
UNS-MS1/8-K1-BN25/1(2)	NO / NC	PVC / 1 m	0111-464
UNS-MS1/8-K3-BN25/1(2)	NO / NC	PVC / 3 m	0111-465
UNS-MS1/8-K5-BN25/1(2)	NO / NC	PVC / 5 m	0111-466
UNS-MS1/8-K1-BN25/3	SPDT	PVC / 1 m	0111-467
UNS-MS1/8-K3-BN25/3	SPDT	PVC / 3 m	0111-468
UNS-MS1/8-K5-BN25/3	SPDT	PVC / 5 m	0111-469

Barksdale

P. Manuel Girona, 2 - 08034 Barcelona
Tlf. 932 80 01 01 - Fax 932 80 64 16

Dimensions (in mm)

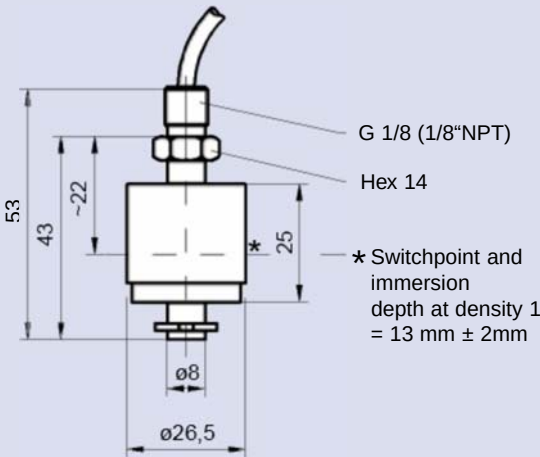

Colour Code

